



GTBZ-S

Self-Propelled Articulating Boom Lifts (Battery Drive)

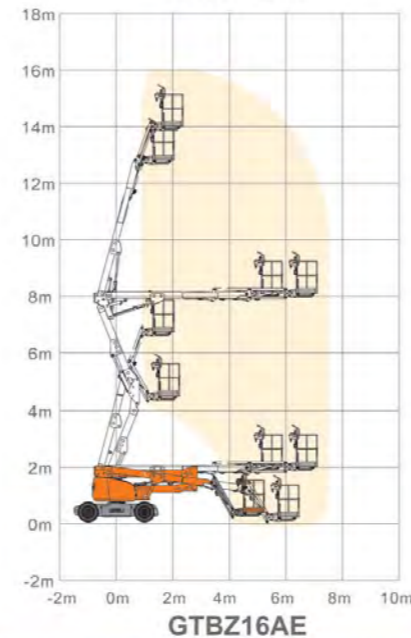

	GTBZ18AE	GTBZ16AE
S.W.L	230kg	230kg
Max.Occupants	2	2
Max.Working Height	18.24m	16.00m
Max.Platform Height	16.24m	14.00m
Max.Horizontal Reach	8.37m	7.15m
Turntable Tailswing	0	0
Up And Over Clearance	8.95m	7.89m
Overall Length(Stowed)	7.31m	6.77m
Overall Length(Transport)	6.10m	5.15m
Overall Width	1.73m	1.73m
Overall Height	2.00m	2.00m
Platform Size(Length/Width)	1.45m×0.76m	1.45m×0.76m
Ground Clearance	0.20m	0.20m
Wheelbase	2.00m	2.00m
Turning Radius(Inside/Outside)	2.08m/3.30m	2.08m/3.30m
Turret Rotation	360°Continuous	360°Continuous
Platform Rotation	160°	160°
Jib Movement	+70°/-60°	+70°/-60°
Batteries	8×6V/420Ah	8×6V/420Ah
Integrated Charger	48V/25A	48V/25A
Drive Motors	AC 48V/3.3kW	AC 48V/3.3kW
Lifting Motor	48V/4.5kW	48V/4.5kW
Travel Speed(Stowed)	6.1km/h	6.1km/h
Travel Speed(Raised)	≤0.5km/h	≤0.5km/h
Gradeability	30%	30%
Max.Working Slope	3°	3°
Hydraulic Tank	30L	30L
Tyres	17.5×6.75	17.5×6.75
Weight	7420kg	6700kg

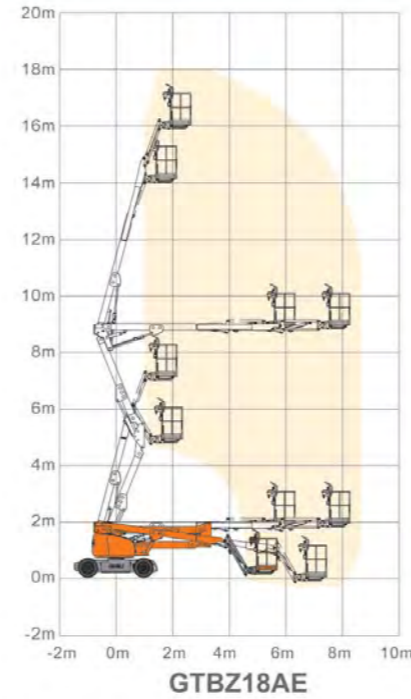


Standard Equipment

- Proportional Controls
- Manual Safety Pump
- Hour Meter
- Tilt Sensor
- 360° Turntable Rotation
- Self-leveling Platform
- Deadman
- Foam-filled Tyres
- 4X2 Drive
- Onboard Diagnostic System
- All Motion Alarm
- Horn
- Flashing Beacon
- Zero Emission

Options

- Non-marking Tyres
- AC Power To Platform
- Platform Work Lights
- Overload Sensor With Alarm

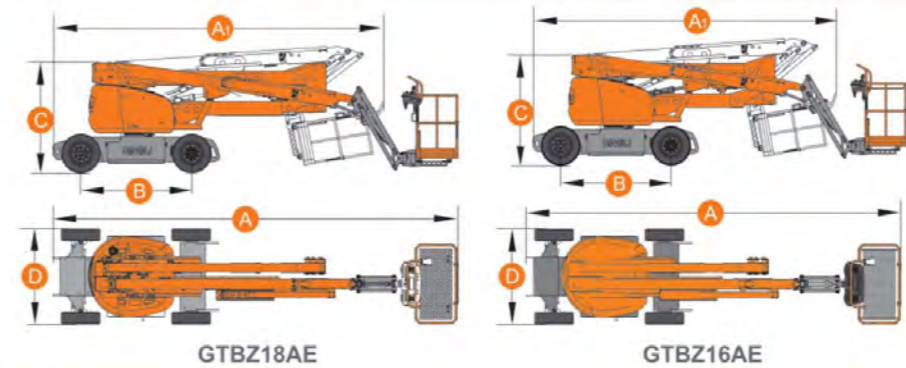

Gradeability



Manual Safety Pump



Waterproof Platform Control



Batteries